



**TDS90030**

**Flush mounting for AURUS 9x14cm**

Mount the AURUS-4XL, AURUS-OLED or AURUS-TFT flat into your walls. This Flush Plaster Box can be used to give a beautiful finish to the AURUS family. It is aesthetic (the touch panel is nicely integrated in the wall) and it gives an extra protection against theft in public areas. For plaster board (hollow wall) mounting an extra TDS90031 Alu-frame is needed (plaster box + alu Frame).

An instruction Video is available on YouTube (“TDS90030 flush mounting video”) showing the installation of the Flush Plaster Box (all phases included). Thanks to the supplied suction pad, the touch panels/screens are removable. Of course, NEVER use a screw driver to remove a touch panel!

**APPLICATION**

Flush mounting for AURUS-4XL, AURUS-OLED or AURUS-TFT.

Theft protection.

! Rem.: Normal operation of the temperature sensor will be disturbed with flush mounting.

**INSTALLATION**

**AURUS-4XL, AURUS-OLED, AURUS-TFT**

Use Flush mounting box TDS90030 for flat mounting. For hollow walls this has to be combined with TDS90031.

Dimensions to be foreseen in the wall (W x H x D):

- Solid wall: 194 x 244 x 40(\*)mm
- Hollow wall: 160 x 210 x 42(\*)mm

\* Foresee enough depth to allow the AUTOBUS cables coming from the back.

**DIMENSIONS**

150 W x 200 H x 40 D (mm)

**NET | GROSS WEIGHT**

0,850 kg | 1,000 kg

**PACKAGING CONTENT**

TDS90030 Plaster block



Suction cup for AURUS removal

Aluminium adaptor plate (for AURUS-4, AURUS-OLED)


**SCHEMATIC DRAWING**

**INSTALLATION IN A  
SOLID WALL**

**TDS90030**

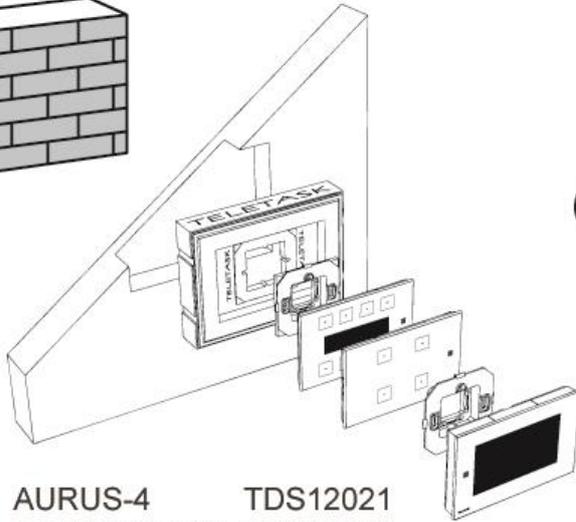

OR


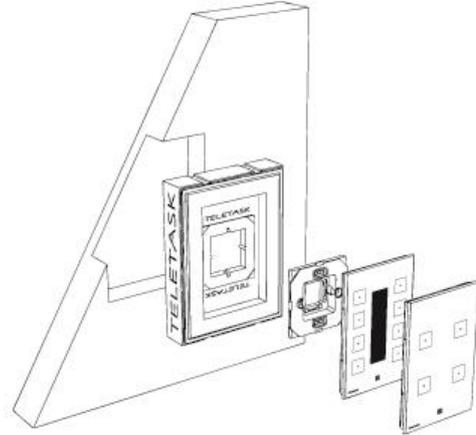


AURUS-4      TDS12021  
AURUS-OLED   TDS12022  
AURUS-TFT    TDS12064


AURUS-4      TDS12021  
AURUS-OLED   TDS12022

**INSTALLATION IN A  
HOLLOW WALL**

**TDS90030**

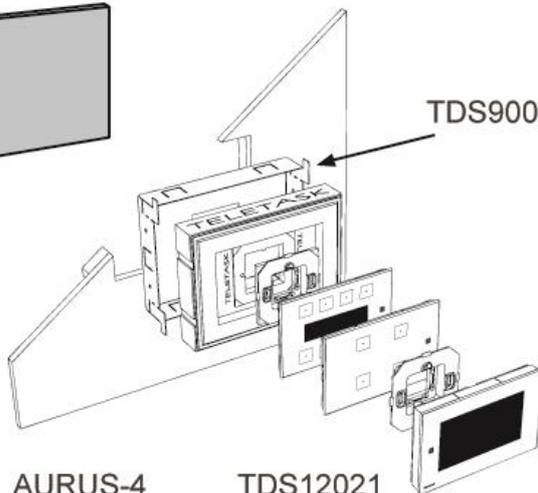

TDS90031 is required

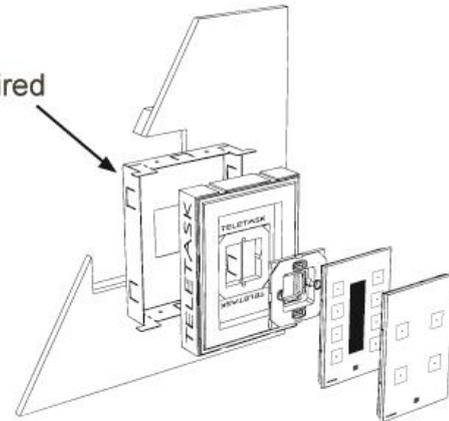

AURUS-4      TDS12021  
AURUS-OLED   TDS12022  
AURUS-TFT    TDS12064

AURUS-4      TDS12021  
AURUS-OLED   TDS12022