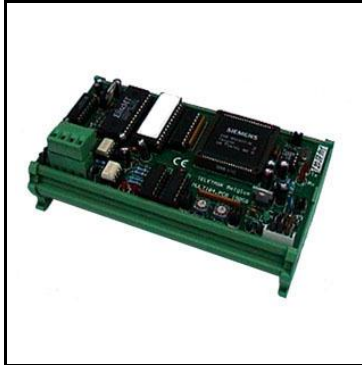


AUDIO ACCESS audio interface; single system
TDS14010


Interface to the AUDIOACCESS PX600 multiroom – multi source audio system.
Permits the simultaneous use of up to 6 audio sources in up to 5 audio zones.

Application:

To control the AUDIOACCESS PX600 system via TELETASK inputs.

Characteristics:

Interface between AUTOBUS and PX600 BUS.
Maximum 6 audio zones and 5 audio sources

Settings:
Functions:

through PROSOFT

AUTOBUS address:

through rotary switches ROT1 + ROT2:

MICROS: from 6 to 25

COMPACT: from 01 to 40

PROJECT: from 01 to 99

AUTOBUS Baud rate:

J2 and J3 (9600)

Installation:

DIN rail mounting

Connections:
AUTOBUS:

by enclosed AUTOBUS connector.

PX600 :BUS:

By screw terminals to the PX600 bus cable.

Dimensions:

Width:131; height: 78; depth: 48 (in mm)

About 7,5 modules

Power Consumption
Minimum

90 mA

Medium

90 mA

Maximum

90 mA

Schematic Drawing:

