

TDS15101 iSGUI licence for smartphones, tablets, PC and Mac



This software license provides the possibility to access all of your domotics functions from a smartphone or tablet (Android, iOS), PC or Mac: lights, heating/cooling, doors, gates, curtains, shutters, moods, motors, sensors, audio,... and IP cameras.

The TELETASK Cloud option offers a secure connection when you are away from home without extra cost.

The configuration of the iSGUI is very easy. The configuration software PROSOFT will copy all the rooms & all functionalities directly and automatically. No extra configuration is needed. With one iSGUI software license, up to 5 simultaneous connections can be made at the same time with the central unit.

APPLICATION

Remote (and local) control of all domotics functions from your (mobile) device.

SYSTEM REQUIREMENTS

Minimum screen resolution: 360x480.

iOS (iSGUI V2.6):

- iOS 9 or higher

Android Smartphone or tablet (iSGUI V2.6):

- ARMv7 or x86 processor with vector FPU, minimum 550MHz, OpenGL ES 2.0, H.264 and AAC HW decoders
- Android™ 4.0 or higher

Windows PC (iSGUI V2.6):

- Windows 7, Windows 8.1, Windows 10

MAC OS (iSGUI V2.6):

- macOS 10.9 Mavericks or higher

Camera visualization

Supports IP cameras with Motion JPEG (MJPEG) encoding (Still Image or Streaming) via HTTP protocol (URL must be available). Must be tested before use. Password protection is supported.

SETTINGS

Configuration

Automatic configuration based on rooms and icons in PROSOFT.

Manual configuration and manual fine-tuning of the screen menu's is also possible using PROSOFT.

INSTALLATION

Use GUIISOFT (PROSOFT Suite 3.6 software or higher). For detailed information on how to prepare and install iSGUI, see our technical handbook.

Activation

Online - www.teletask.be. An activation file can be downloaded if the following data is provided: License code, the type and serial number of the Central Unit.

Test mode

Test mode available (without license) during maximum 3 days.

Demo mode

Press the 'Demo' button on first launch to control our TELETASK Demo house.

CONNECTIONS

Local access

Through local Wi-Fi Access point or router with Wi-Fi.

Mobile access 3G, 4G, ... or Wi-Fi (at home or away)

TELETASK Cloud

TELETASK offers a powerful cloud solution for the simple integration of mobile devices via a safe TLS connection. The major advantage of this integration compared with VPN is that it is both easy and safe.

VPN

Through Wi-Fi hotspot or mobile data connection (EDGE, 3G, HSDPA, 4G...), secured with VPN connection. An (additional) router with VPN technology and DNS service are required. Find more detailed information in the installation manual.

PACKAGE DIMENSIONS

175 W x 250 H x 3 D (mm)

PACKAGE WEIGHT

0,1 kg

PACKAGE CONTENT

License code for iSGUI for smartphone, tablet, PC and Mac. Quick installation manual.


SCHEMATIC DRAWING

Local WiFi

Router + Central unit
IP configuration



iSGUI
On local WiFi




Classic VPN setup

Router + Central unit
DNS configuration
VPN configuration




Additional VPN router
required if not compatible

DNS
(paid service)
DNS configuration



iSGUI
VPN configuration
URL configuration

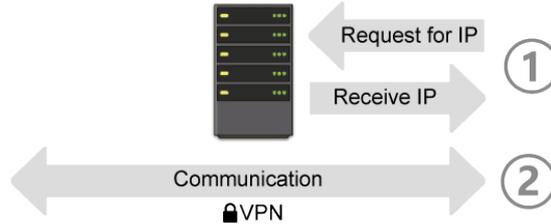

Cloud setup

Router + Central unit
No configuration



TELETASK Cloud
User configuration



iSGUI
Login

