



TDS1511x

CONTROL TOWER Master or Client licenses

“CONTROL TOWER” is the perfect solution for managing and safeguarding multiple buildings like houses, flats, offices, shops, showrooms, service flats, hotel rooms, etc.... This contains safeguarding of technical alarms and the control of all available integrated home- and building automation features. In other words, Control Tower enables you to offer technical alarm management and additional services to the people living or working in the connected buildings.

A project may contain up to 250 Clients (houses/buildings) and up to 6 online Master PC's.

APPLICATION

Local and remote control of houses/buildings using a Microsoft PC.

CHARACTERISTICS

For Windows 7 / 8 / 8 Pro (not Windows 8 RT) / 10. Works in “full screen” mode.

License system

For every project, only one TDS15110 Master license is needed.

For every Client building (= nbt file) a TDS15111 Client license is needed. Every Client can be real-time connected with up to 3 Master PC's. If more than 3 real-time Masters are needed, a second Client license is needed in every Client building.

Camera visualization

Supports IP cameras with Motion JPEG (MJPEG) encoding (Still Image or Streaming) via HTTP protocol (URL must be available). Must be tested before use. Password protection is supported.

For any other types of camera, use the browser function.

Browser

Dynamic HTML pages, e.g. camera's, weather forecast, traffic information, e-mail, news channels, social network websites, ...

SETTINGS

Easy “drag and drop” configuration in PROSOFT Suite and the CONTROL TOWER configurator.

INSTALLATION

By GUIISOFT in PROSOFT Suite (starting from PROSOFT Suite 3.3.0.60 or higher) and the CONTROL TOWER configurator. For detailed information see the “technical handbook”, section “Creating a Control Tower”.

Activation

Online - www.teletask.be. An activation file can be downloaded if the following data is provided: the License code, the type and serial number of the Central Unit.

Test mode

Available (without activation) for a maximum of 30 days for the TDS15110 Master license (3 days for the TDS15111 Client license).

CONNECTIONS

LAN

Through Ethernet or via a Wi-Fi Access point/router.

WAN

Through Ethernet, Wi-Fi hot spot or mobile data connection (GPRS, EDGE, 3G, 4G, HSDPA, ...), secured with a VPN connection. A mobile data subscription and router with VPN technology are required. See technical handbook, for more detailed information.

Secured connection

TELETASK recommends the use of a VPN connection to the individual buildings. A single VPN router is sufficient for a full protected high speed communication. At CONTROL TOWER site, a multi-VPN router is to be used. Such devices are available on the ICT market as standard devices from different brands.

PACKAGE DIMENSIONS

175 W x 250 H x 3 D (mm)

PACKAGE WEIGHT

0,1 kg


PACKAGE CONTENT

TDS15110

License code for CONTROL TOWER Master license.

TDS15111


License code for CONTROL TOWER Client license.



SCHEMATIC DRAWING

TDS15110

GUARD ON SITE

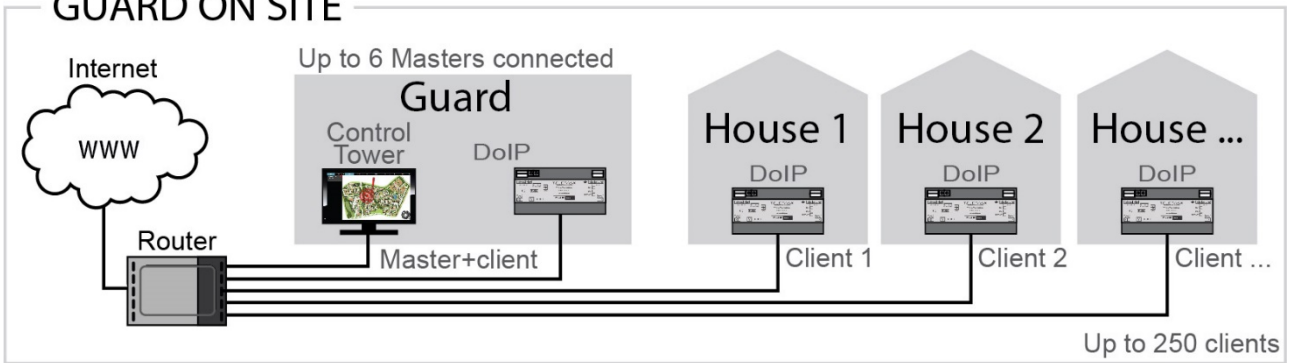

GUARD ON REMOTE SITE

