

TDS14401xx

PORTUS MAX

PORTUS MAX is a video door phone station for high-end residential and professional projects, built to combine design, security, and reliability. From a simple doorbell to structured multi-tenant and office setups—with keyless entry options, multi-apartment/company routing, face recognition, keypad, badges, and QR codes for time-limited or single-use visitor access.

Designed as an architectural touchpoint, it's available in four finishes: alu-black, gold bronze, old bronze and smoking gun bronze. Together with the OPUS 7" touch screen, the PORTUS MAX integrates with TELETASK to connect door entry to broader building functions like lighting scenes, gate/door control, ect. It can (optional) forward door calls to up to 16 smartphones.

APPLICATION

Door call and entry system with optional call forwarding to up to 16 mobile phones.

CHARACTERISTICS

General

The PORTUS MAX is provided with a colour touch screen, bell push button, capacitive keypad for PIN code access and colour video camera with a wide range of features, including face- and QR code recognition. It is also provided with a tag reader for hi-frequency access tags.

Order numbers

- Alu Black: TDS14401AB
- Bronze Gold: TDS14401BG
- Bronze Old: TDS14401BO
- Smoking Gun: TDS14401BM

SETTINGS

Configuration

Via LAN browsing to the internal server.

INSTALLATION

On wall or in wall mounting. The necessary wall box is included with the unit.

CONNECTIONS

Network/power

PoE (IEEE 802.3 af)

Inputs

External bell push button

Outputs

- Door contact output (2x).
- Wiegand output

POWER CONSUMPTION

PoE 15W

DIMENSIONS

124 W x 280 H x 45 D (mm) SEE DRAWING

NET | GROSS WEIGHT

1,64 kg | 2,00 kg

PACKAGING CONTENT:

- TDS14401xx unit
- Rubber cable lock (S, M, L)
- Backplate + 4 screws M3x4
- 4 screws M4x20
- Wall box

ENVIRONMENTAL CONDITIONS

Storage (with no condensation or icing)

- Temperature: -40°C to +75°C max.
- Relative humidity: 5% to 85% max.

Operation (with no condensation or icing)

- Temperature: -20°C to +60°C max.
- Relative humidity: 5% to 80% max.


PROTECTION RATE



- IP58 (Ingress Protection)
- IK06 (Impact Protection)

LIMITED WARRANTY

2 years

SCHEMATIC DRAWING

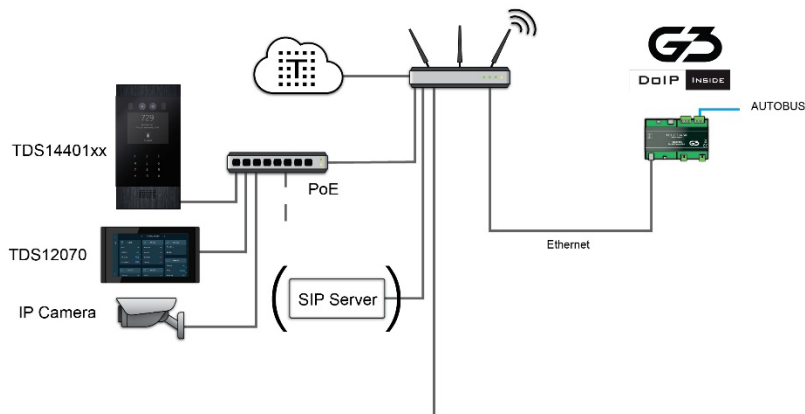

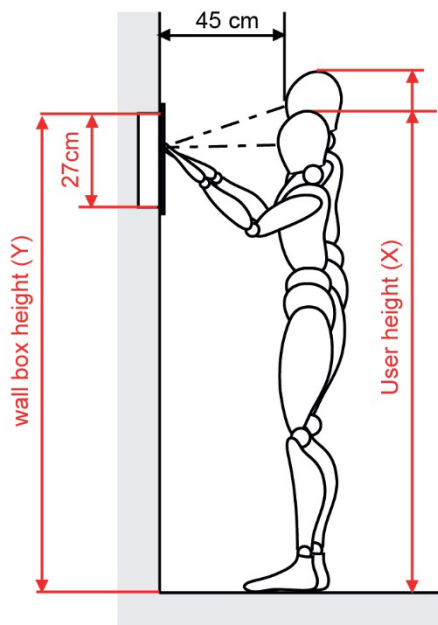

X	Age	Y
115<X<125	(6)	115
125<X<135	(8)	125
135<X<145	(10)	135
145<X<155		145
155<X<165		155
165<X<175		165
175<X<185		175
185<X<195		185
195<X<205		195

All values in cm

Remark: Wall box (top) height (Y) = smallest user height (X)

Remark: To be able to control the touch screen from out of a wheelchair, the wall box height (Y) should not be higher as 125cm.





Alu Black (AB)

Bronze Gold (BG)

Bronze Old (BO)

Bronze Smoking Gun (BM)

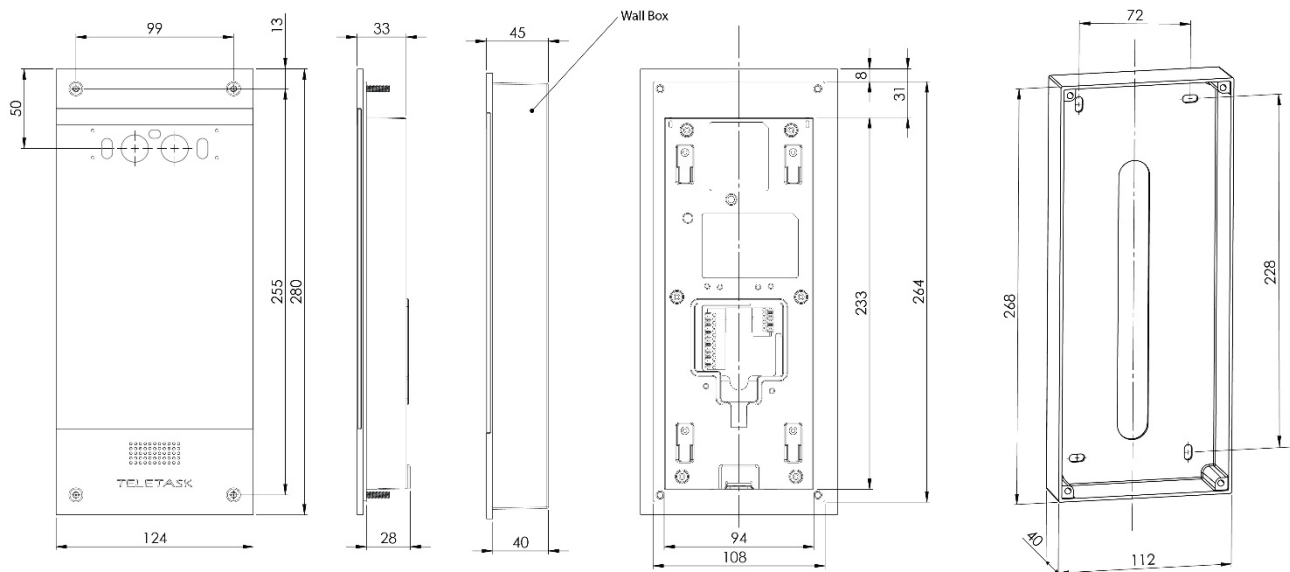

Connections

